
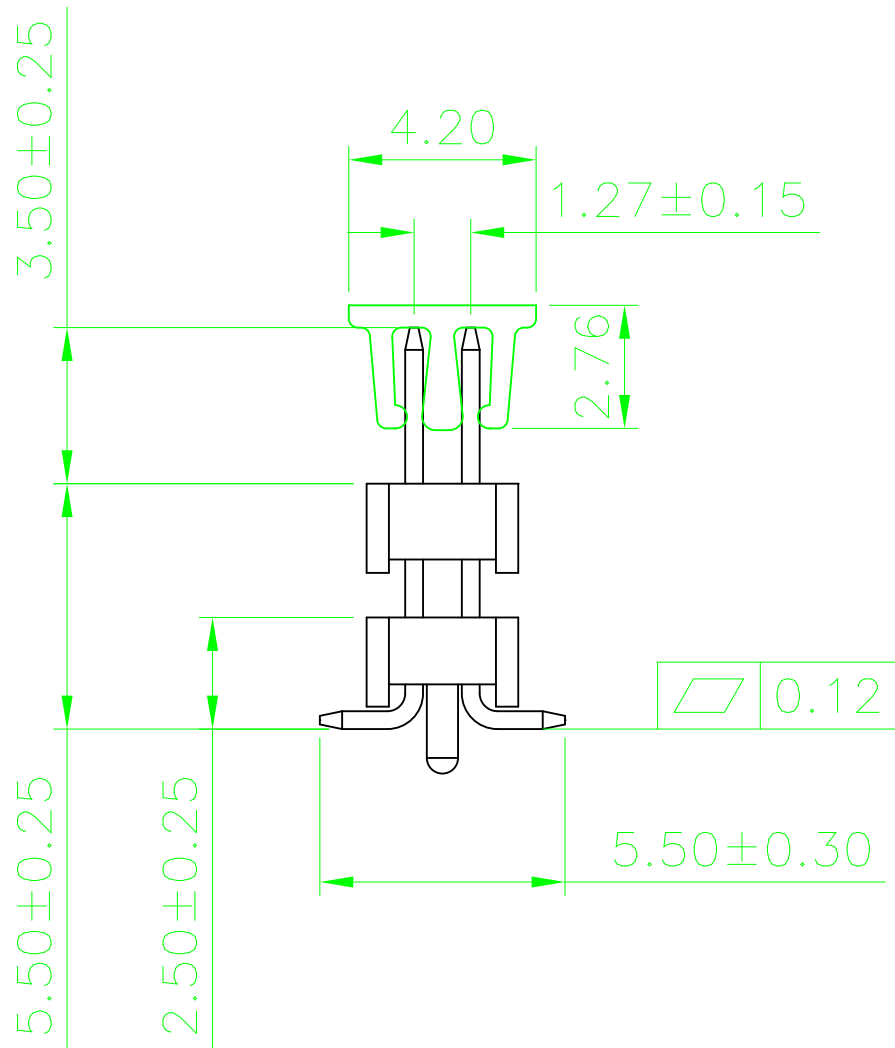
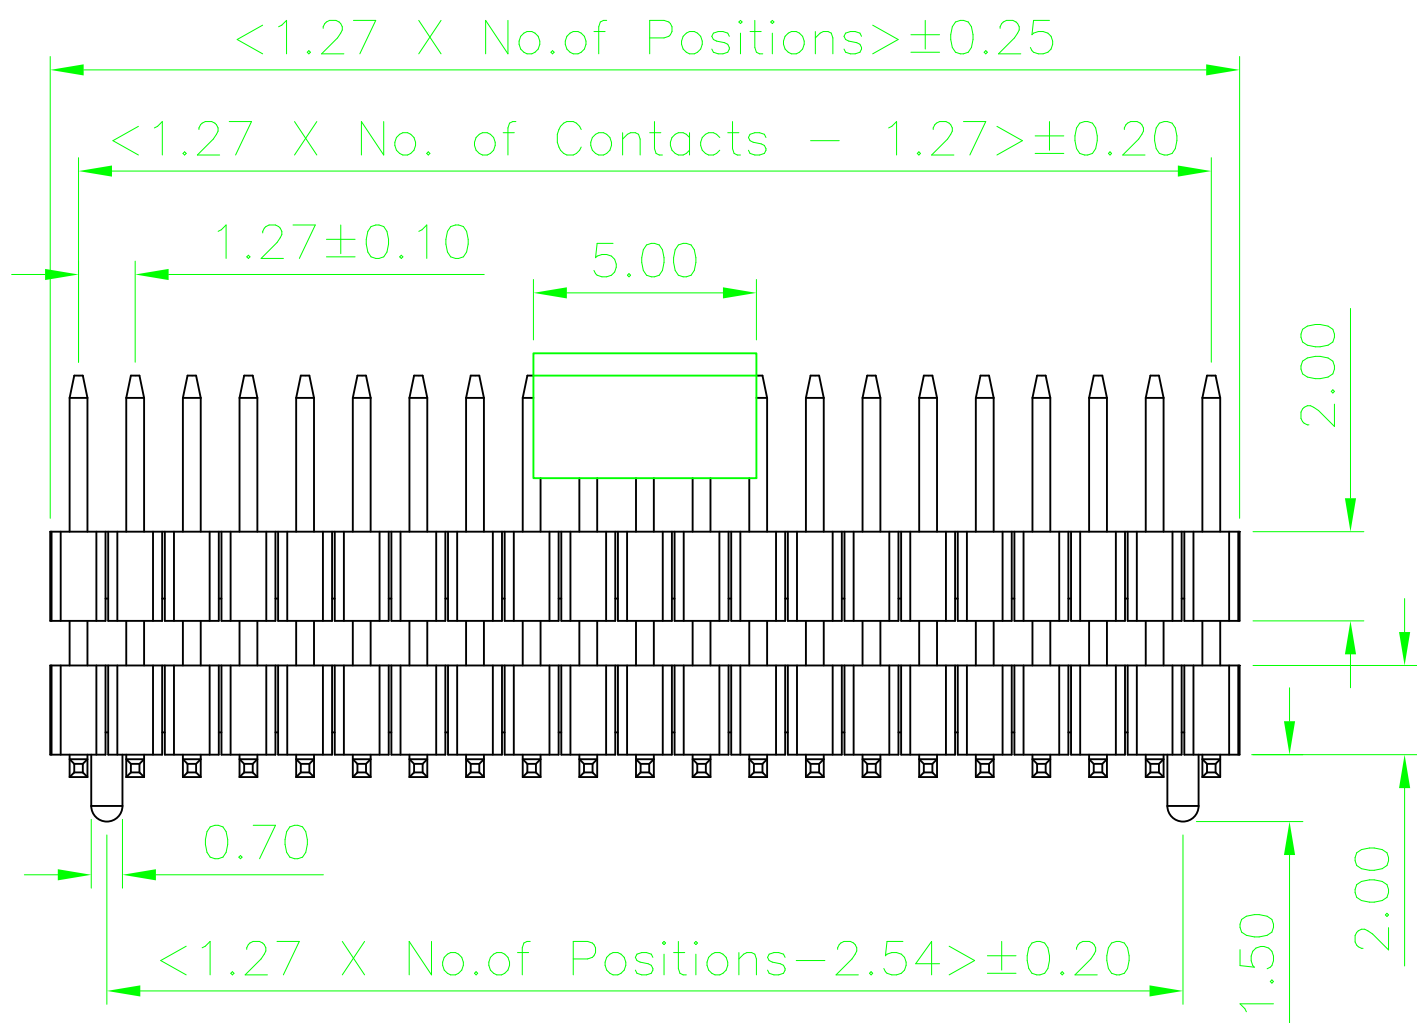


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INITIAL RELEASE.	2010-10-13	黄美君

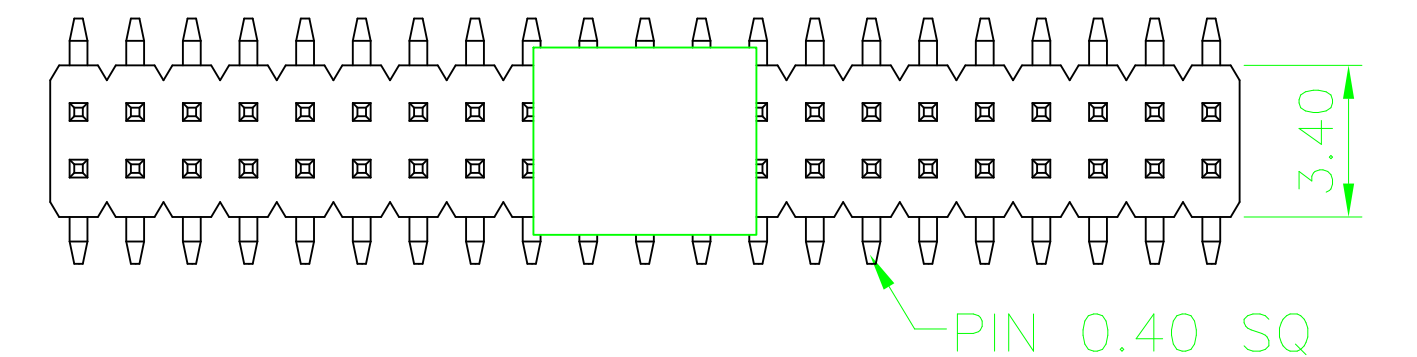


Specifications

Current Rating: 1Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester, UL 94V-0 NY 6T
All materials must be Geron materials

RECOMMENDED P.C.B LAYOUT (Tolerance:±0.05)

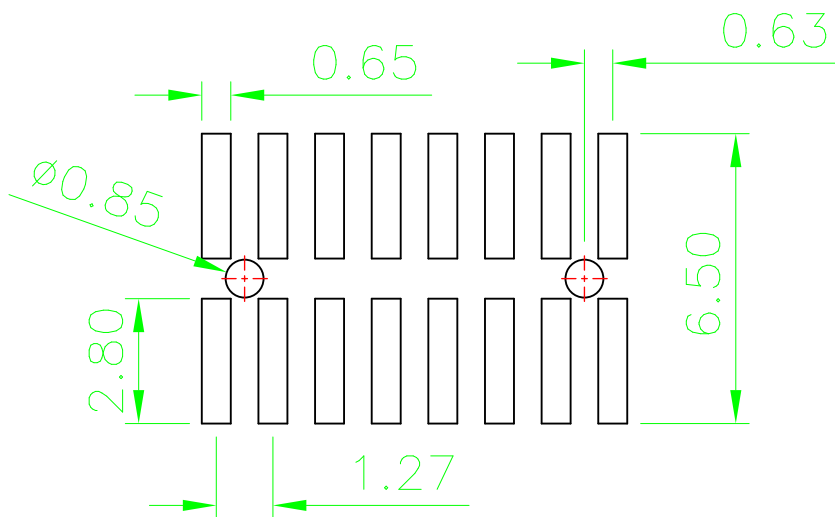

Ordering Information

GRA52	-	XX	XX	ZS06-2	-	X
		No. of Pins per Row 05~50	Contact Plating 01=Tin 02=Gold Flash Standard Duplex plating 05=Gold Flash /Tin ...	Options P=cap T=tape reel PT=cap+tape reel		

GERON ELECTRONIC CO., LTD

GENERAL TOLERANCE

X.° ± 5.0°	X. ± 0.30
.X° ± 3.0°	.X ± 0.25
.XX° ± 2.0°	.XX ± 0.15
.XXX° ± 1.0°	.XXX ± 0.10

DESIGN:

CHECKED:

AUDITED:

APPROVED:

DATE: 2010-10-13

DATE:

DATE:

DATE:

DWG. NO.

GRA52-ZS06-2

PART NO.

GRA52-XX-XX-ZS06-2-X

TITLE.

1.27 PIN HEADER
DUAL ROW SMT TYPE
BASE 2.00H

REV.	UNIT.	SCALE.	PAGE.	
A	mm	3:1	1/1	