REV.	DESCRIPTION	DATE

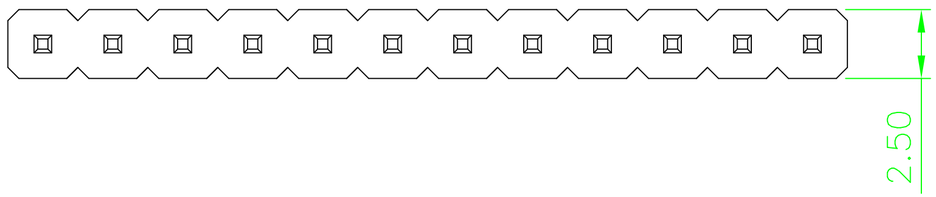

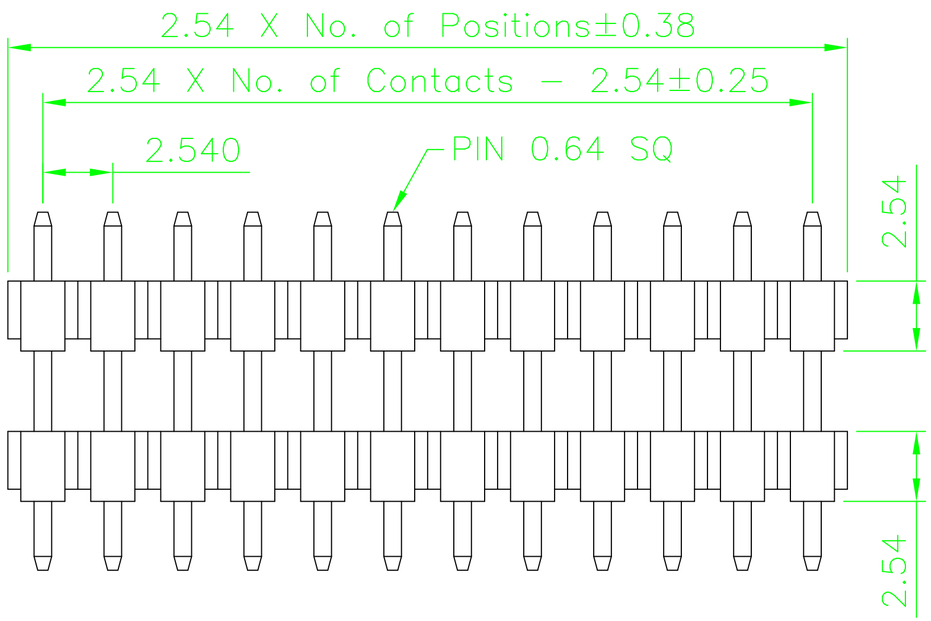

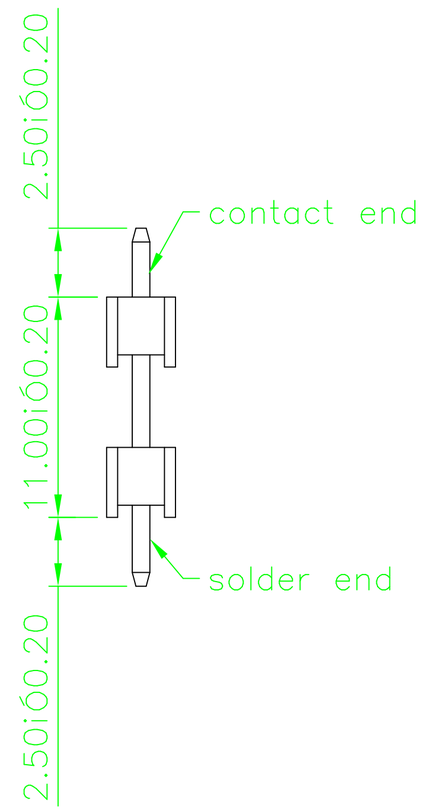

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature:−40°C to +105°C

Materials

Contact Material: Copper Alloy
Insulation Material: Polyester, UL 94V−0
PBT
All materials must be Geron materials

Ordering Information

GRA91 – XX XX Z009-S2

No. of Pins per Row
02~40

Contact Plating
01=Tin
02=Gold Flash
Duplex Plating
05=Gold Flash/Tin
...

Recommended P.C.Board
Hole Layout



GERON ELECTRONIC CO., LTD	GENERAL TOLERANCE		DESIGN: DRAWN	DATE: DATE	DWG. NO. GRA91−Z009−S2	TITLE.
	X.° ± X.°	X. ± .X	CHECKED:	DATE:		2.54HEADER
	.X° ± X.	.X ± .X				
	.XX° ± XX.	.XX ± .XX	AUDITED:	DATE:	PART NO. GRA91−XX−XZ009−S2	
	.XXX° ± 0.5°	.XXX ± .XXX	APPROVED:	DATE:		
REV. REV. / UNIT. UNIT / SCALE. SCALE						