
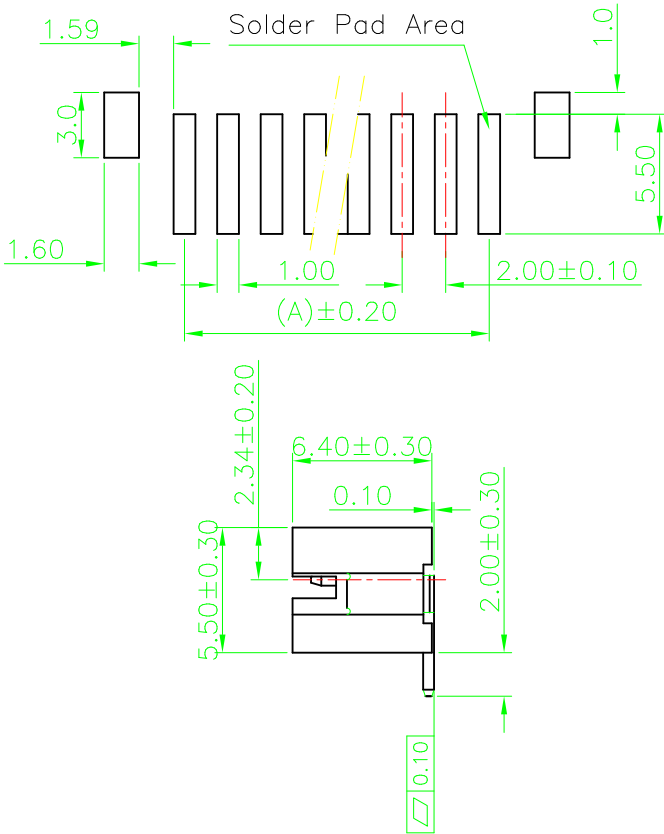


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2010.11.8	

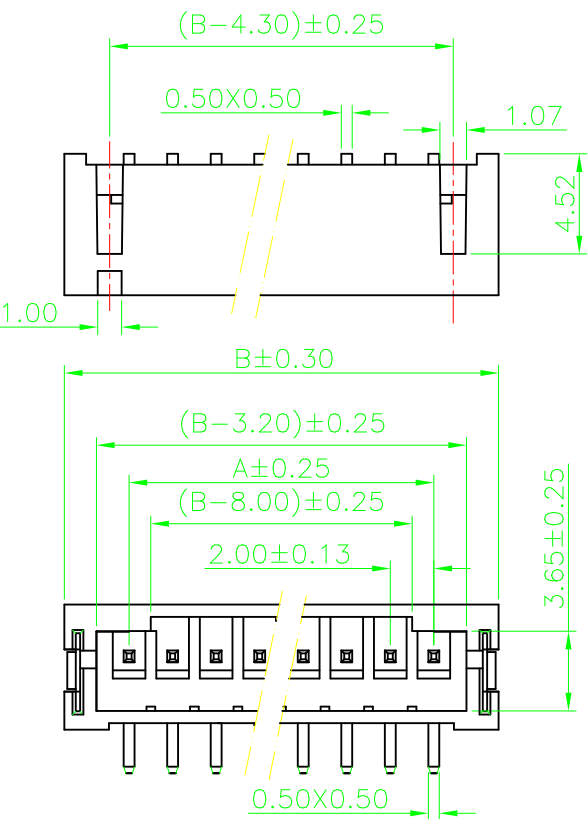

SPECIFICATION:
 CURRENT RATING : 1A(max.)
 VOLTAGE RATING : 100V AC/DC
 CONTACT RESISTANCE : 20mΩ (max.)
 INSULATION RESISTANCE : 1,000MΩ MIN
 WITHSTAND VOLTAGE : 800V AC/MINUTE
 TEMPERATURE RANGE : -25°C TO +85°C

FEATURES:
 MATERIAL : NYLON 6T UL94V-0
 CONTACT : BRASS

All materials must meet Geron requirement for environment protection

Ordering Information

GRC71 - XX XX ZS01 X

No. Pins: 02-16
 Contact Plating: 01=Tin, 02=Gold Flash
 COLOR: Q=Cream-colored, D=WHITE

GERON ELECTRONIC CO., LTD					GENERAL TOLERANCE		DESIGN:	DATE: 2010.11.8	DRAWING GRC71-ZS01	TITLE 2.00 WAFER SMT TYPE
					X.* ± 1.5° X. ± 0.30		CHECKED:	DATE: 2010.11.8		
					.X.* ± 1.0° .X. ± 0.20		AUDITED:	DATE: 2010.11.8		
REV.	UNIT.	SCALE.	PAGE.		.XX* ± 0.5° .XX ± 0.15					
01	mm	3:1	1/1		.XXX* ± 0.3° .XXX ± 0.10					

