
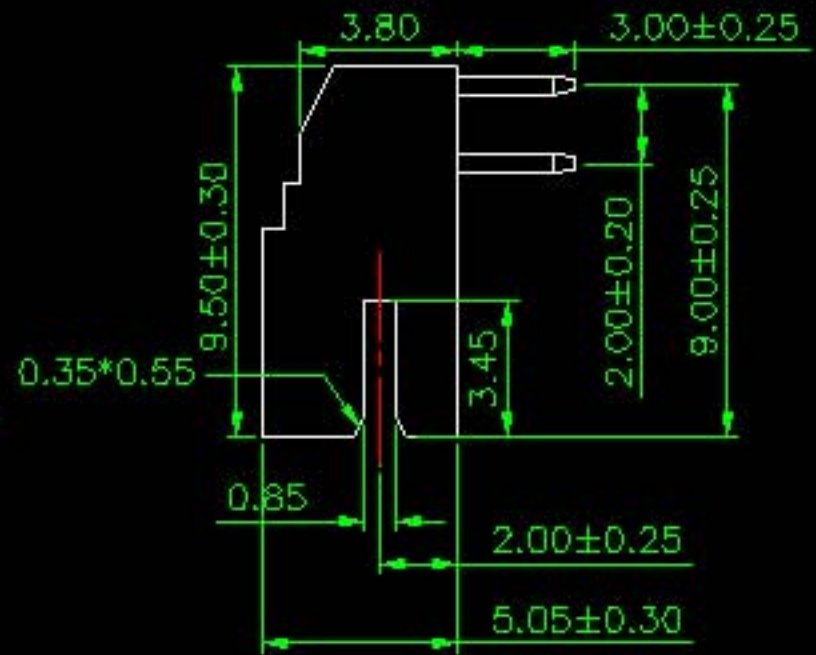



REV.	LOGAS	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE	2010.11.8	

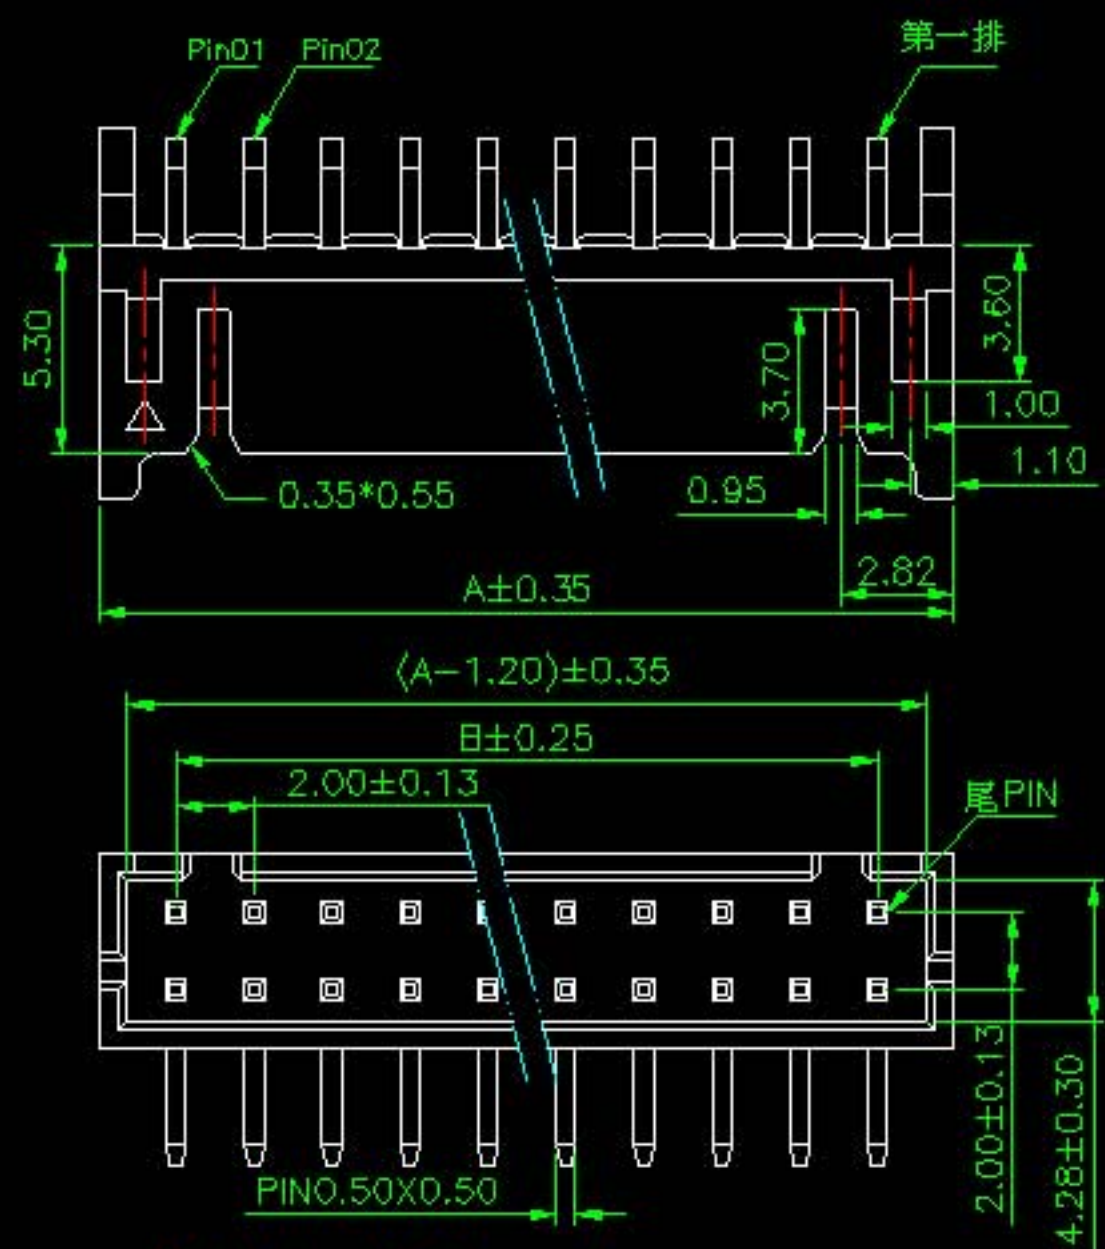

Specifications
 Voltage Rating: 250V(AC,DC)
 Current Rating: 2A(AC,DC)
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 800VAC/minute
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -25°C to +85°C

Materials
 Contact Material: Brass
 Material: Nylon66+15%GF,UL 94V-0

All materials must meet Geron requirement for environment protection

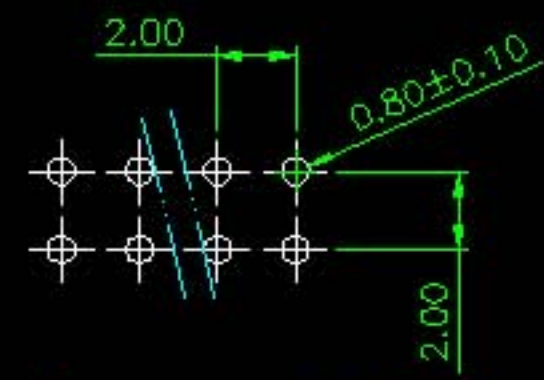

Recommended P.C.Board
Hole Layout

CIRCUITS	DIM A	DIM B
03	8.00	4.00
04	10.00	6.00
05	12.00	8.00
06	14.00	10.00
07	16.00	12.00
08	18.00	14.00
09	20.00	16.00
10	22.00	18.00
11	24.00	20.00
12	26.00	22.00
13	28.00	24.00
14	30.00	26.00
15	32.00	28.00
16	34.00	30.00
17	36.00	32.00
18	38.00	34.00

Ordering Information

GRC72 - XX XX W01 X

No. of Pins per Row 03-18
 Contact Plating 01-Tin 21-Sn
 Colour B-GRAY D-WHITE

GERON ELECTRONIC CO., LTD

GENERAL TOLERANCE	
X* ± 5.0°	X. ± 0.30
.X* ± 3.0°	.X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN:	DATE: 2010.11.8
CHECKED:	DATE: 2010.11.8
AUDITED:	DATE: 2010.11.8

DRAWING	GRC72-W01
PART NO.	GRC72-XX-XX-W01-X

TITLE
 WAFER FOR PITCH
 2.00mm 90°

REV.	UNIT.	SCALE.	PAGE.
01	mm	4:1	1/1