


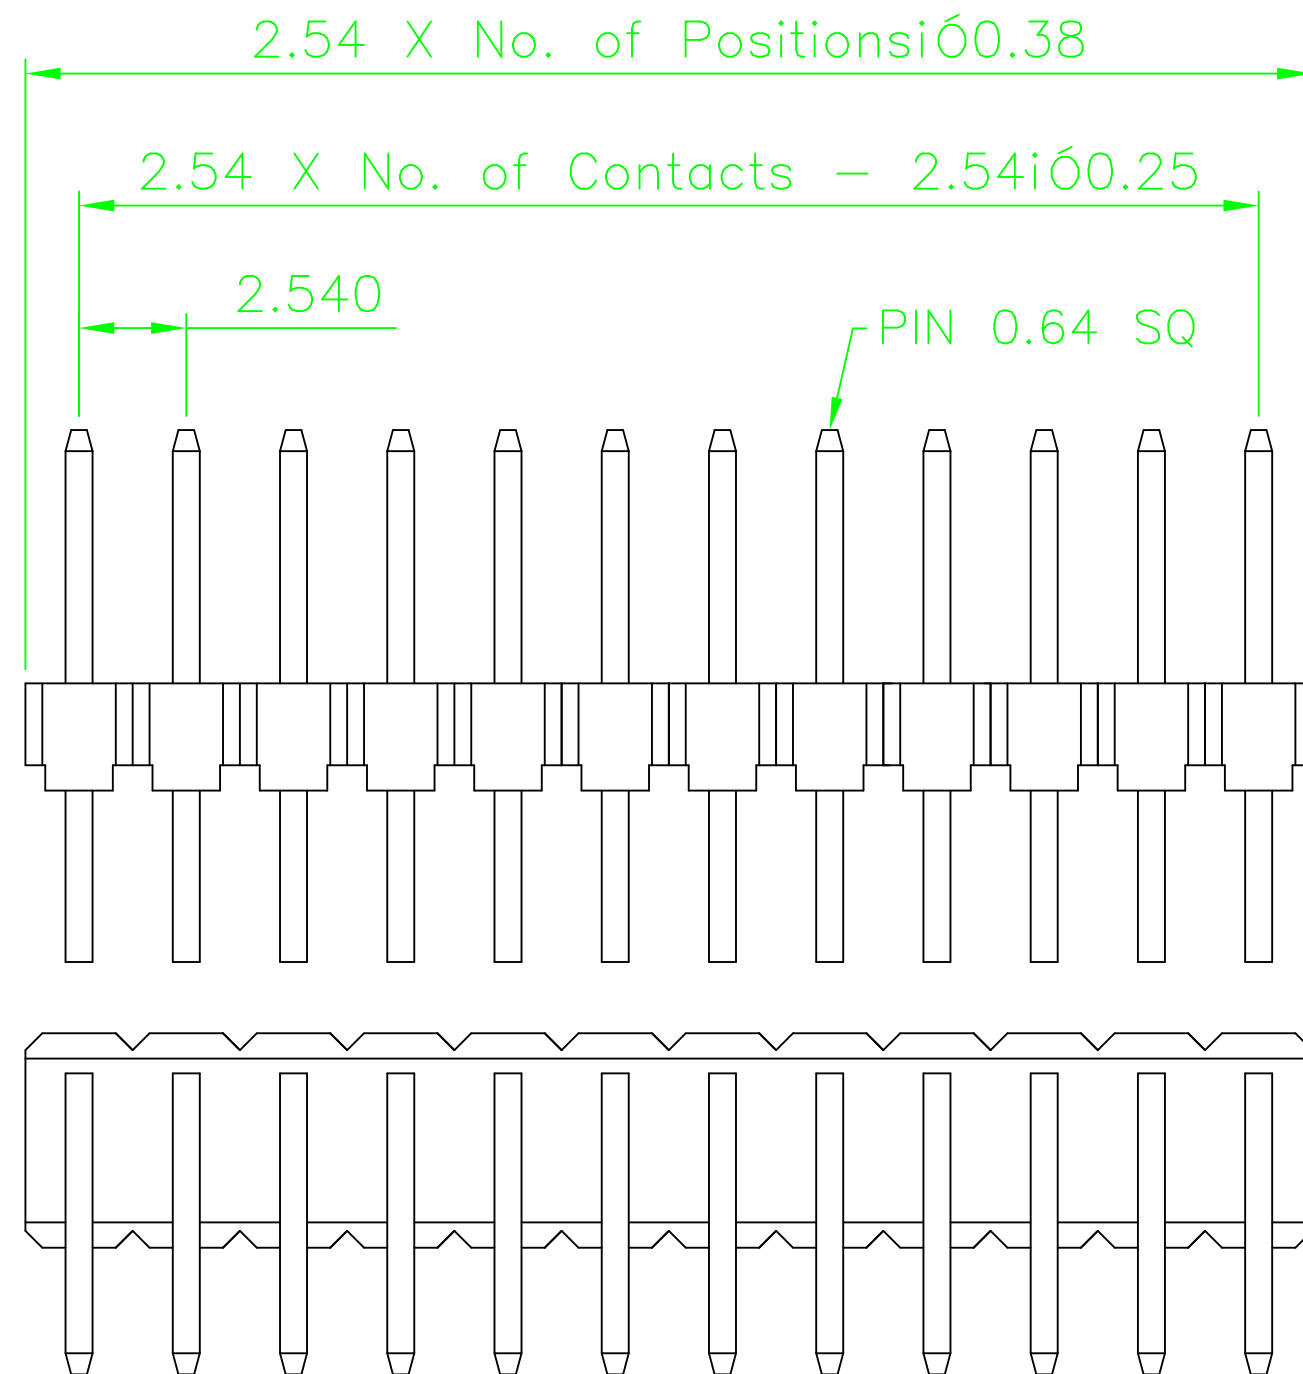


Specifications


Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
Insulation Material: Polyester, UL 94V-0 P.B.T
All materials must be Geron materials

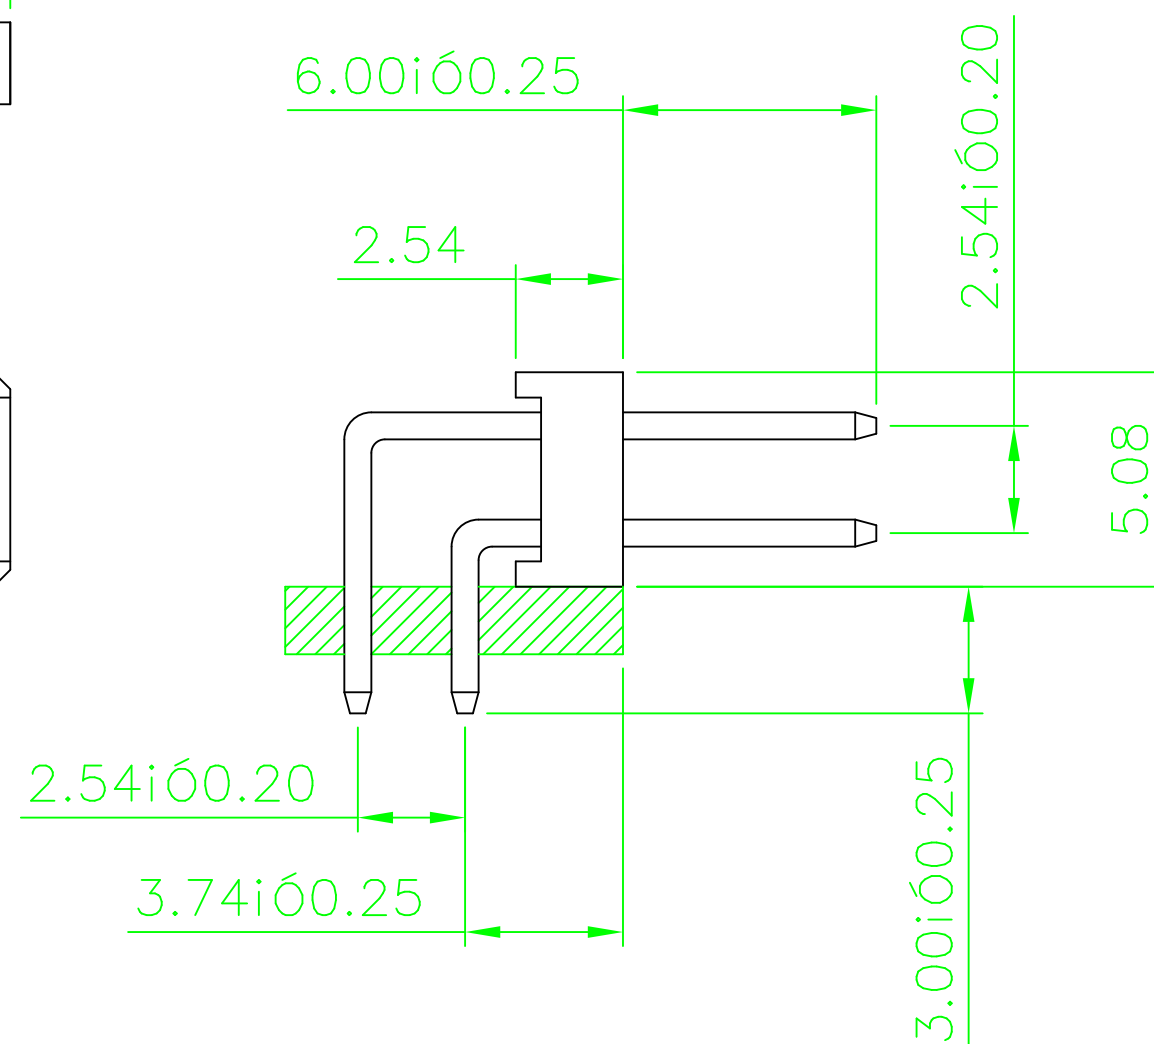

Recommended P.C.Board Hole Layout

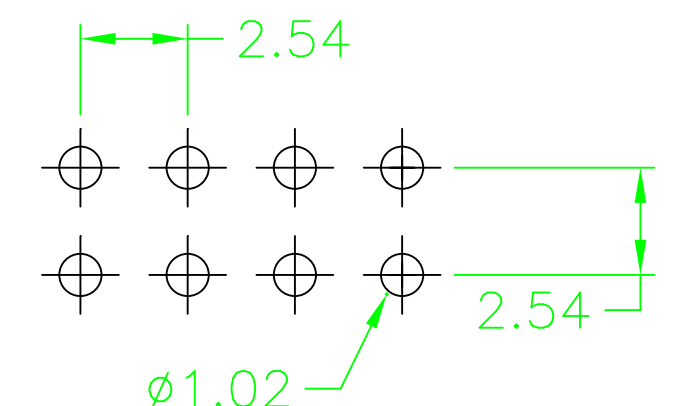

Ordering Information

GRA92 - XX XX W02

No. of Pins per Row
02~40

Contact Plating
01=Tin
02=Gold Flash
Duplex plating
05=Gold Flash /Tin
...

GERON ELECTRONIC CO., LTD

GENERAL TOLERANCE

X.° ± X.° ±	.X ° ± .X° ±
X. ± X. ±	.X ± .X ±
XX. ± XX. ±	.XX ± .XX ±
XXX. ± XXX. ±	.XXX ± .XXX ±

DRAWN

DRAWN

DATE

DATE

DWG. NO.

GRA92-W02

TITLE

2.54 PIN HEADER

CHECK

DATE

PART NO.

GRA92-XX-XX-W02

APPROVE

DATE

REV.

REV.

UNIT

UNIT

SCALE

SCALE

