



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2014.8.2	ZHOU

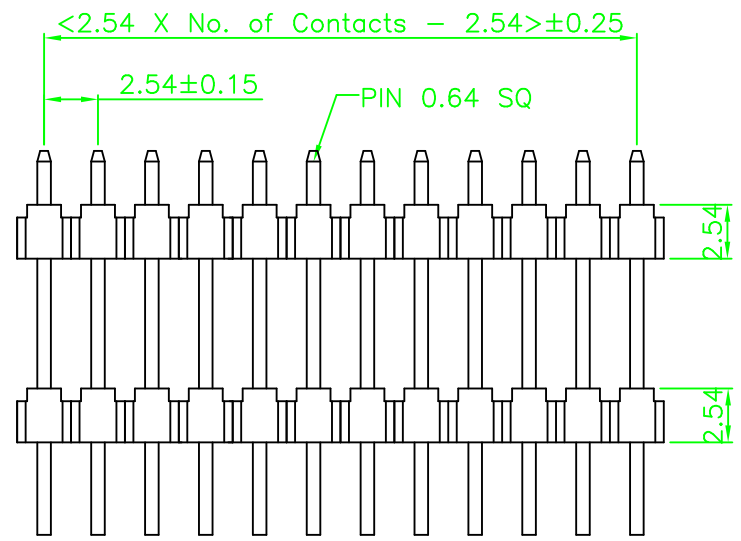

### Ordering Information



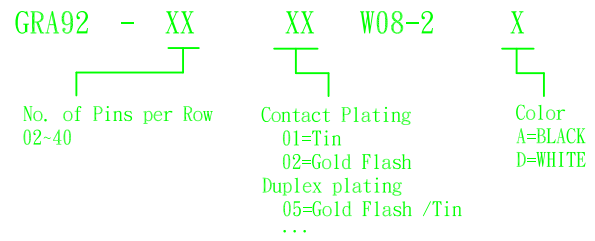


### Specifications

Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

### Materials

Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0  
 Nylon6T  
 All materials must be Geron materials

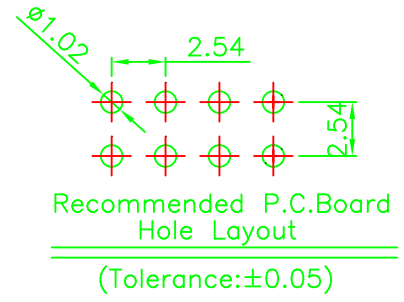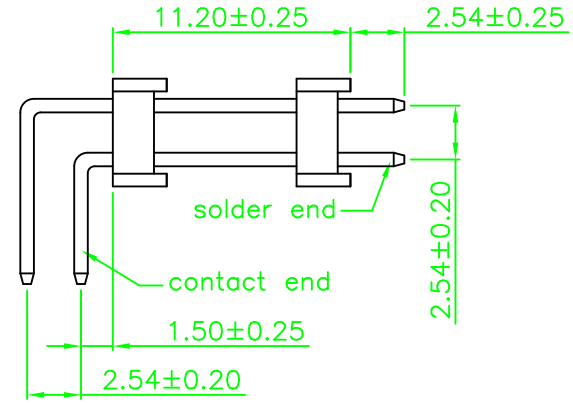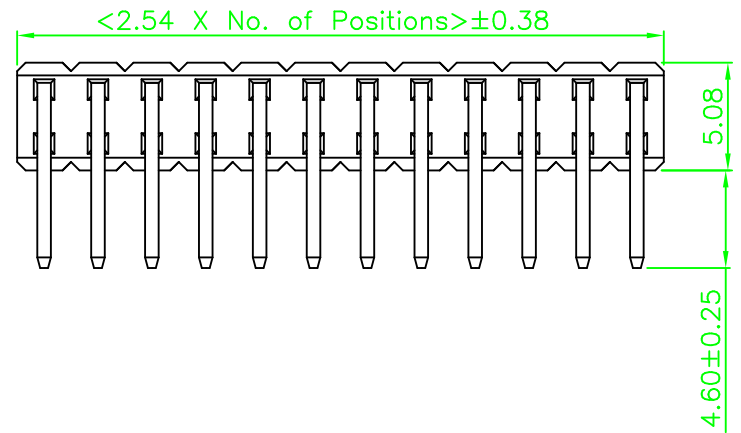

**Geron Electronic Co.,Ltd**

GENERAL TOLERANCE	
X.* ± 5°	X. ± 0.30
.X* ± 3°	.X ± 0.25
.XX* ± 2°	.XX ± 0.15
.XXX* ± 1°	.XXX ± 0.10

DESIGN: ZHOU	DATE: 2014.08.02
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.	GRA92-W08-2
PART NO.	GRA92-XX-XX-W08-2

TITLE.	2.54 PIN HEADER DUAL ROWS R/A TYPE BASE 2.54H
--------	---

REV. 01	UNIT. mm	SCALE. 3:1	PAGE. 1/1	
---------	----------	------------	-----------	--